

**DATA SHEET
#SPS101**

**MODEL H
QUICK RESPONSE
STANDARD ORIFICE
SIN: AS5652/AS5651**

Model

- “Automatic” Quick Response Standard Orifice Glass Bulb Sprinklers, Model H - 1/2” Orifice x 1/2” NPT - Upright & Pendent

K Factor

- 5.6 (8.1)

Sprinkler Identification Number (SIN)

- Upright AS5652, Pendent AS5651

Approvals

- UL Listed, ULC Listed, FM Approved*, MEA Accepted, No. 192-98-E

To Specify

- Furnish and install “Automatic” Sprinkler Brand Model H Quick Response Standard Orifice Glass Bulb Sprinkler. Style, NPT, orifice, K-Factor, finish, and temperature rating as required.

Temperature Ratings

- 135°F (57°C)
- 155°F (68°C)
- 175°F (79°C)
- 200°F (93°C)
- 286°F (141°C)

Finishes



- Plain Brass
- Chrome Plated
- White
- Black**
- Bright Brass
- Lead Coated

Note:

See back of page for available style, temperature rating and finish combinations.

*135°F & 155°F only; White & Black finishes not FM Approved.

**155°F & 200°F - Pendent only.

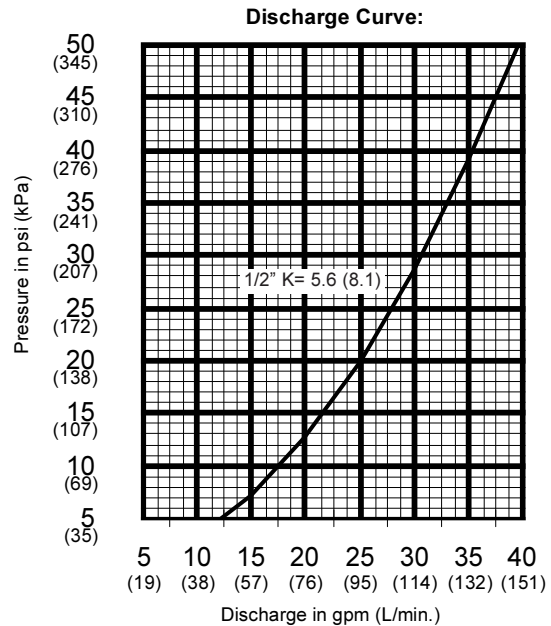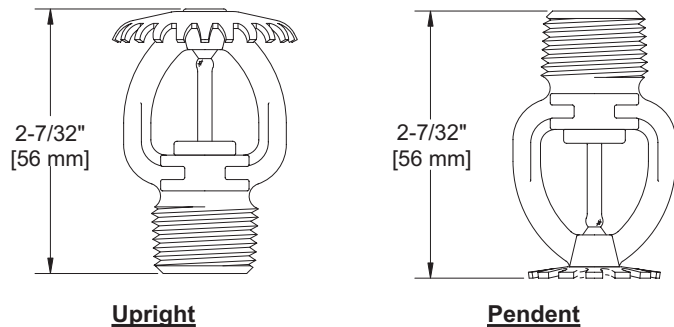

QUICK RESPONSE SUBMITTAL SHEET

Ordering Information

- “Automatic” Model H - 1/2” Orifice x 1/2” NPT - Upright & Pendent

Type	Temperature Rating	Maximum Ambient Temperature	K Factor	Finish	Upright		Pendent	
					Part No.	Submittal (Check One)	Part No.	Submittal (Check One)
Model H	135°F (57°C) (Orange Bulb)	100°F (38°C)	5.6 (8.1)	Brass	8586010		8587010	
				Chrome	8586011		8587011	
				Lead Coated	8586013		8587013	
				White	8586017		8587017	
				Bright Brass	-		8587018	
Model H	155°F (68°C) (Red Bulb)	100°F (38°C)	5.6 (8.1)	Brass	8586020		8587020	
				Chrome	8586021		8587021	
				Lead Coated	8586023		8587023	
				White	8586027		8587027	
				Bright Brass	-		8587028	
				Black	-		8587029	
Model H	175°F (79°C) (Yellow Bulb)	150°F (66°C)	5.6 (8.1)	Brass	8586030		8587030	
				Chrome	8586031		8587031	
				Lead Coated	8586033		8587033	
				White	8586037		8587037	
				Bright Brass	-		8587038	
Model H	200°F (93°C) (Green Bulb)	150°F (66°C)	5.6 (8.1)	Brass	8586040		8587040	
				Chrome	8586041		8587041	
				Lead Coated	8586043		8587043	
				White	8586047		8587047	
				Bright Brass	-		8587048	
				Black	-		8587049	
Model H	286°F (141°C) (Blue Bulb)	225°F (107°C)	5.6 (8.1)	Brass	8586050		8587050	
				Chrome	8586051		8587051	
				Lead Coated	8586053		8587053	
				White	8586057		8587057	
				Bright Brass	-		8587058	

This information is only a general guideline. The company reserves the right to change any portion of this information without notice. Terms and conditions of sale apply and are available on request.