

**DATA SHEET  
#SPS111**

**MODEL H  
QUICK RESPONSE  
RECESSED HORIZONTAL SIDEWALL  
SIN: AS5633**

**Model**

- "Automatic" Quick Response Recessed Horizontal Sidewall Sprinklers, Model H - 1/2" Orifice x 1/2" NPT

**K Factor**

- 5.6 (8.1)

**Sprinkler Identification Number (SIN)**

- AS5633

**Approvals**

- UL Listed, ULC Listed, MEA Accepted, No. 192-98-E

**To Specify**

- Furnish and install "Automatic" Sprinkler Brand Model H Quick Response Recessed Horizontal Sidewall Sprinkler. Style, NPT, orifice, K-Factor, finish, and temperature rating as required.

**Temperature Ratings**

- 135°F (57°C)      • 175°F (79°C)
- 155°F (68°C)      • 200°F (93°C)\*

**Finishes**

- Brass                      • White
- Chrome                    • Bright Brass



**Trim Ring Finishes**

- Antique Brass      • Painted (Decorator White)
- Bright Chrome      • Bright Brass

\* See installation limitation above

**Note:**

See back of page for available style, temperature rating and finish combinations.

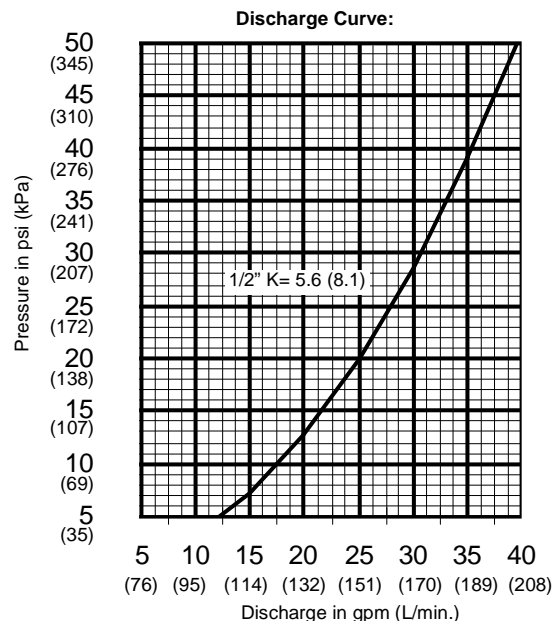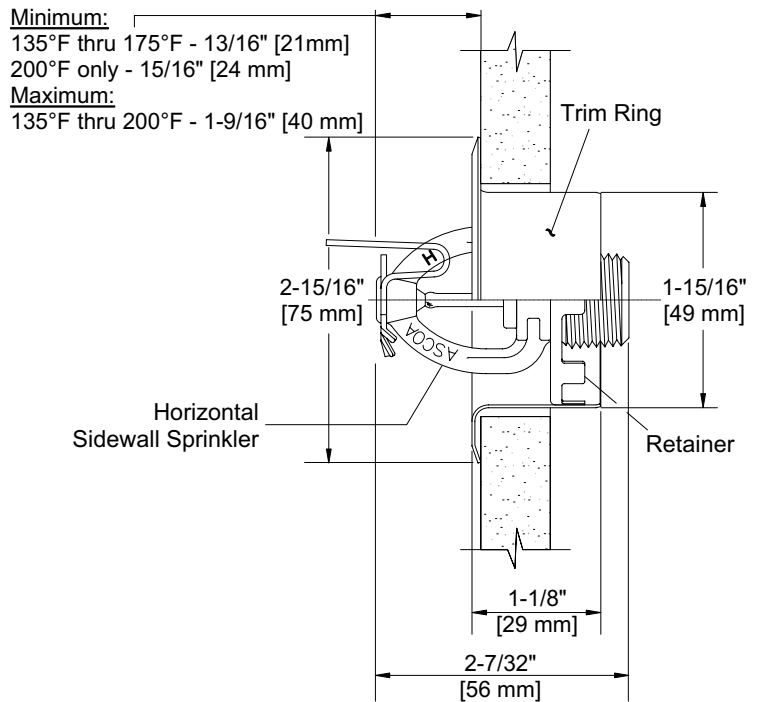

# QUICK RESPONSE SUBMITTAL SHEET

## Ordering Information

- “Automatic” Model H Quick Reponse Recessed Horizontal Sidewall Sprinklers - Escutcheons

Finish	Symbol No.	Stock Code No.	Submittal (Check One)
Antique Brass	38-555H	8048555	
Bright Chrome	38-525H	8048525	
Painted White	38-556H	8048556	
Painted Black	38-553H	8048553	
Bright Brass	38-554H	8048554	

## Ordering Information

- “Automatic” Model H Quick Reponse Glass Bulb Sprinklers - 1/2” Orifice x 1/2” NPT - Horizontal Sidewall  
To be used with Model H Recessed Sprinkler Escutcheons

Type	Temperature Rating	Maximum Ambient Temperature	K Factor	Finish	Stock Code No.	Submittal (Check One)
Model H	135°F (57°C) (Orange Bulb)	100°F (38°C)	5.6 (8.1)	Brass	8581010	
				Chrome	8581011	
				White	8581017	
				Bright Brass	8581018	
Model H	155°F (68°C) (Red Bulb)	100°F (38°F)	5.6 (8.1)	Brass	8581020	
				Chrome	8581021	
				White	8581027	
				Bright Brass	8581028	
Model H	175°F (79°C) (Yellow Bulb)	150°F (66°F)	5.6 (8.1)	Brass	8581030	
				Chrome	8581031	
				White	8581037	
				Bright Brass	8581038	
Model H	200°F (93°C) (Green Bulb) (See installation limitation above)	150°F (66°F)	5.6 (8.1)	Brass	8581040	
				Chrome	8581041	
				White	8581047	
				Bright Brass	8581048	

This information is only a general guideline. The company reserves the right to change any portion of this information without notice. Terms and conditions of sale apply and are available on request.

07/01 Printed in USA SPS111.QXD

**“Automatic” Sprinkler Fire Protection Equipment**